

Features 产品特点

Snap in panel mount installation	安装方便迅速, 性能可靠
Choice of colored caps.	客制化帽盖选择, 丝印&移印服务
Choice of painted colored caps.	可少量订购
Available with small quantity order.	

Applications 使用范围

Electric welder	电焊机等焊接设备
Welding equipments	各种仪器仪表及电子设备
Instrument and electronic equipments	


General Specifications: (产品规格)

Contact Rating: 22(14)A 250V AC
Contact Resistance: 50mΩ Max.
Insulation Resistance: 100mΩ Min.
Dielectric Strength: Breakdown is not allowable; 4500V AC for 1 minute
Operating Life: 50,000 cycles
Level of protection: IP55
Operating Temperature: -25° C to 85° C

KCD2 SERIES




Dimensions P.C.B Layout

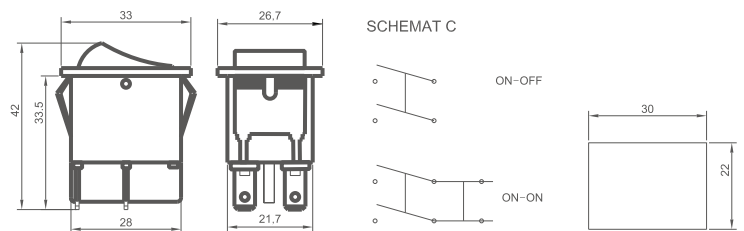

KCD18 SERIES




Dimensions P.C.B Layout

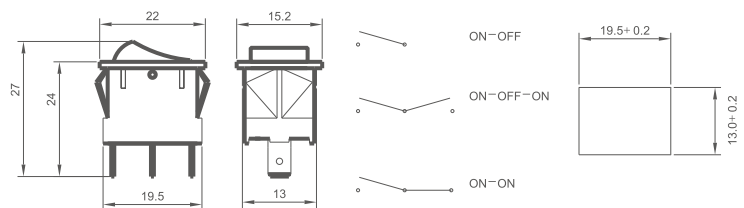

KCD19 SERIES



Dimensions P.C.B Layout

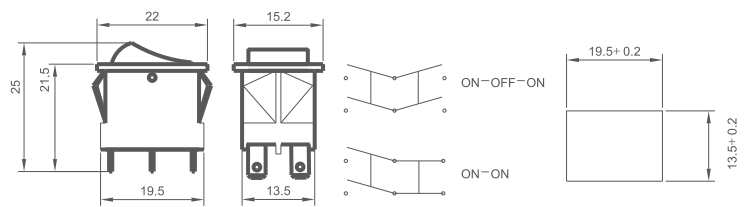

Sh00 SERIES



Dimensions P.C.B Layout

